

Constant Low Temp. Water Baths | Benchtop Type

BBL111C/311C

Temp. control range -10~+80°C

Temp. distribution accuracy $\pm 0.3^{\circ}\text{C}$

Internal capacity 8L 13L

Benchtop constant low temperature water baths that ensure a wide temperature range and ample water bath space.

Features

- Achieves precise temperature control with an adjustment accuracy of $\pm 0.1^{\circ}\text{C}$.
- Expands the usability of the water bath itself and fully guarantees effective space within the bath.
- Equipped with an external circulation function.
- Switching between internal and external circulation can be easily achieved by operating the water valve.
- Shelf height can be adjusted in 2 segments, allowing for the use of small containers.
- Features automatic stop operation, automatic start operation, RS485 communication function, and temperature output terminal (4~20mA) as standard.

Safety

- Self-diagnosis function, leakage circuit breaker to prevent overcurrent, pressure detection for the refrigeration unit, anti-dry heating float switch, overload protection relay for the refrigeration unit, delay function for refrigeration unit protection.




Specification


Model		BBL111C	BBL311C	
System		Pump-circulated cooling/External closed-loop circulation		
Performance	Operating temp. range	-10~80°C		
	Temp. adjusting accuracy	$\pm 0.1^{\circ}\text{C}$		
	Temp. distribution accuracy	$\pm 0.3^{\circ}\text{C}$		
	Temp. unit	0.1°C		
	Cooling capacity	Approx. 300W (260Kcal/h), at liquid temp. 15°C	Approx. 410W (350Kcal/h), at liquid temp. 15°C	
Composition	Temp. control	PID control		
	Operation functions	Fixed operation, automatic stop operation, automatic start operation		
	Temp. sensor	Temperature regulator: Pt thermal resistor, for overheat protection: K-type thermocouple		
	Temp. setting, display	Digital setting, digital display		
	Refrigerator, refrigerant	Air cooling		
		160W, R134A	350W, R404A	
	Stirring method	Magnetic pump		
	Device circulation capacity (50/60Hz)	Max. flow rate	3.7/4.7L/min	
		Pump capacity	11/12L/min	
		Max. lift head	1/1.5m	
		Pump capacity	1.5/2.1m	
	Heater	700W	900W	
	Cooling pipe	Nickel-plated copper		
External circulation port	Both the outlet and return ports have an outer diameter of 11mm			
Operating ambient temp. range	5~30°C			
Safety device	Self-diagnosis function, overload protection relay for the refrigeration unit, pressure detection for the refrigeration unit, anti-dry heating float switch, delay function for refrigeration unit protection, key lock function, automatic overheating protection function, leakage protection switch for over-current, overheating protector			
Other functions	Water valve, condenser filter, RS485 communication function, temperature output terminal (4~20mA), refrigeration unit pressure indicator, deviation correction function, power failure compensation function			
Specifications	Water bath dimensions (W×D×H mm)	300×150×177.5	300×240×177.5	
	Effective water bath dimensions (W×D×H mm)	238×100×85	238×190×85	
	Internal bath capacity (effective capacity)	8L (6.75L)	13L (11.5L)	
	External dimensions (W×D×H mm)	500×530×500	500×600×500	
	Power supply (50/60Hz)	AC220V 5A	AC220V 6A	
Weight	Approx. 35kg	Approx. 55kg		
Accessories	Shelves, top cover, drainage pipe, overflow pipe			

Heating/cooling · cooling capacity curve

Heating Cooling Curve

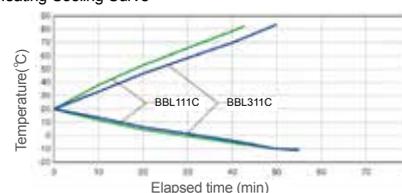


Cooling Capacity Curve

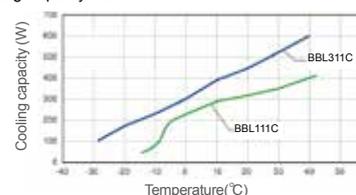

Flow/head curve

Flow/Head Curve

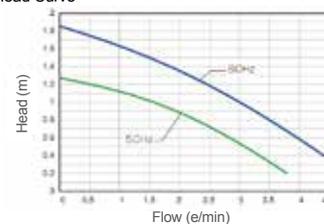

1 Sterilizers

2 Granulation and Spray Dryers

3 Muffle Furnaces

4 Ovens

5 Incubators

6 Plasma Equipment

7 Water Purifiers

8 Baths

9 Water Circulators

10 Rotary Evaporators

11 Freeze Dryers & Cold Traps

12 Stirrers & Shakers

13 Washers

14 Analysis and Test Devices

15 Options