

# Vacuum Drying Oven

Standard Small Size Benchtop Vacuum Drying Oven



## ADP200C/210C/300C/310C

Operating temp. range	40~240°C	Operating pressure range	101~0.1kPa	Internal capacity	10L(ADP200C/210C) 27L(ADP300C/310C)
-----------------------	----------	--------------------------	------------	-------------------	--

### Standard vacuum drying oven with enhanced safety features

#### Operation and functions

- Easy input of parameters and settings
- Digital PID controller supports fixed temperature, quick auto-stop, auto stop, auto start and program operations
- Self-diagnostic and overheating prevention functions
- Silicon rubber door seal prevents air from leaking
- Independent over heating prevention device for each circuit
- Customizable with N<sub>2</sub> gas inlet and communication ports
- Calibration off-set function
- Easy maintenance

#### Safety features

- Sensor trouble detection, SSR, short circuit detection, heater disconnecting detection, memory error, over heating and measurement temperature error



10L  
ADP200C

27L  
ADP300C

#### Specifications

Model	ADP200C/210C	ADP300C/310C
System	Vacuum drying by decompressed chamber direct heating	
Operating temperature range	40~240°C	
Operating pressure range	101~0.1kPa (760~1 Torr)	
Temp. control accuracy	±1.5°C (at 240°C)	
Max. temp. reaching time	~70min.	~100min.
Interior Material	Stainless steel	
Temp. control method	PID control by microprocessor	
Sensor	K-thermocouple	
Temp. setting method	Digital setting by ▲/▼ keys	
Temp. display method	Measurement temp.: Digital display by green LED Setting temp.: Digital display by red LED	
Timer	1 min. to 99 Hrs. 59 min. and 100 Hrs. to 999 Hrs. and 50 min., Digital display	
Heater	Mica heater 0.68kW	1.05kW
Heat insulating material	Rock wool	
Observation window	Tempered glass (12 mm thickness) and polycarbonate resin plate	
Vacuum gauge	Bourdon tube type, 0~0.1 MPa (Gauge pressure)	
Safety device	Self diagnostic functions (Heater, Sensor, SSR short circuit, automatic overheat prevention function), over current electric leakage breaker, overheating prevention device	
Internal dimensions	W200 x D250 x H200mm	W300 x D300 x H300mm
External dimensions	W400 x D412 x H603mm	W500 x D465 x H705mm
Internal capacity	10L	27L
Shelf loading	~15kg / pcs	
Shelf rest step number	2 steps	3 steps
Shelf rest pitch	65mm	75mm
Vacuum port	O.D.18mm	
Power source	AC115V 6A with plug AC220V 3.5A no plug, round terminal	AC115V 9.5A with plug AC220V 5A no plug, round terminal
Weight	~30kg	~55kg
Included accessories	Shelf plate (aluminum perforated metal) 2 pcs.	Shelf plate (aluminum perforated metal) 3 pcs.

#### Optional Items

Description	Product code
Shelf	
ADP200C/210C	297071
ADP300C/310C	297072
*N <sub>2</sub> gas introduction device 30L/min. (factory installed)	Contact Customer Service

\* Please specify when ordering main unit.

#### Recommended Pumps

Description	Product code
Oil pump	
GLD137CC 115V 162L/min, 5.7CFM with Rubber Hose Kit	GLD137CC115DPRKIT
GLD137CC 220V 162L/min, 5.7CFM with Rubber Hose Kit	GLD137CC220DPRKIT
Dry vacuum pump	
ADP NEODRY15G1 100-240V DRY VACUUM PUMP KIT	NEOADPCKITA

## Internal view of ADP




## Control Panel




## Method

[Side view]

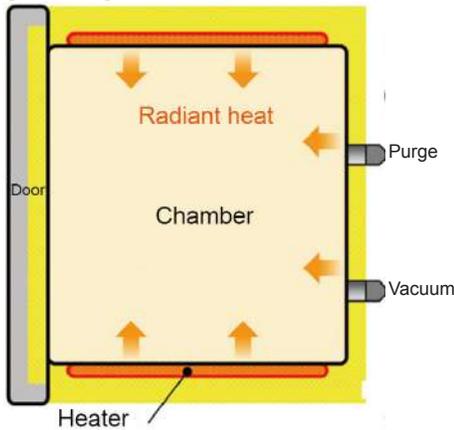

## Dimensions (Unit:mm)

Upper part

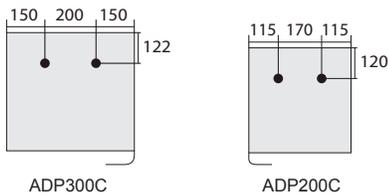


### ⚠ Attention

- Never use in flammable or explosive gas atmosphere
- Never use explosive or flammable material
- Caution: High temperature components

## Sample Installation with Cold Trap

Use with CA Series

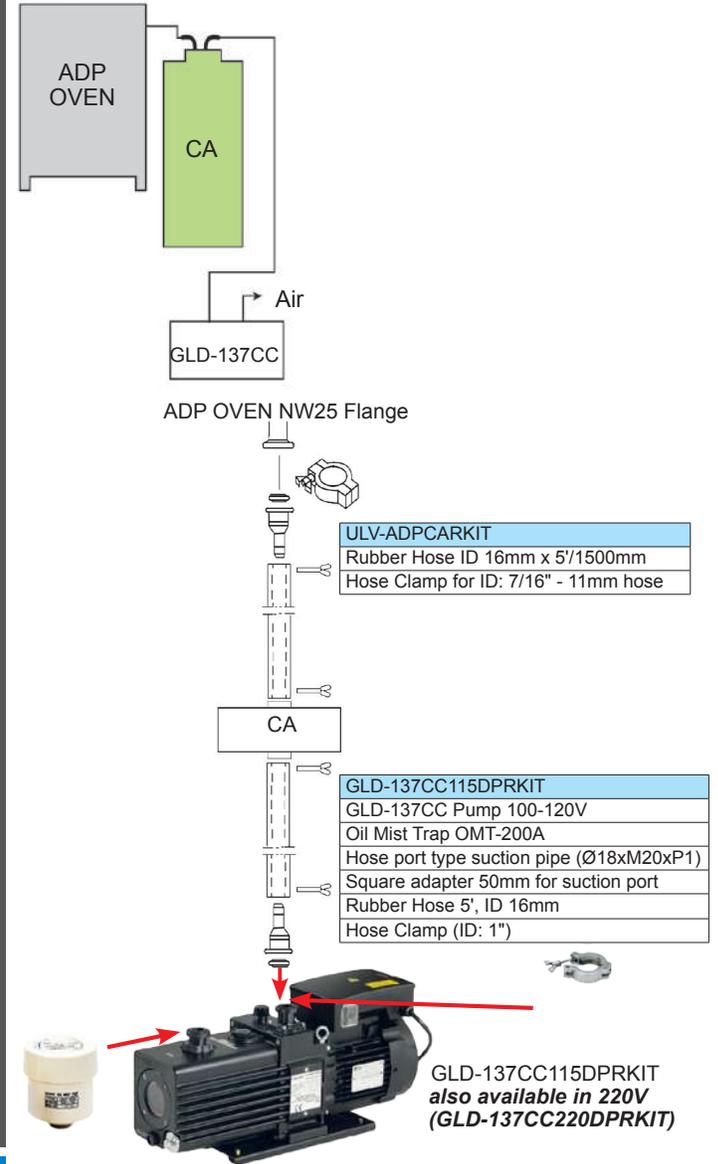

## GLD-137CC for ADP Series

